

DELTA-T

9x45.HD.RF

Compact, lightweight rangefinder binoculars



Thank you for considering this precision optical equipment.


Delta Optical spółka z ograniczoną odpowiedzialnością sp.k.
Nowe Osiny, ul. Piękna 1, 05-300 Mińsk Mazowiecki, Poland
TEL +48 25 786 0520 | FAX +48 25 759 2995
BetterForever@deltaoptical.eu | DeltaOptical.eu



THE AIM IS OPTICAL PERFECTION

DELTA-T 9×45.HD.RF

SKU DO-2720



Fluoride glass.
Crisp image.

Inclination angle.
Vertical offset.
Horizontal distance.
Scan mode: 3 readings per sec.



Compact.
Lightweight.
Magnesium Alloy.



5-level OLED.

OPTICS / CONSTRUCTION

Magnification	9x
Objective	45mm / 1.8"
FOV @1000m	117m / 6.7°
Min. Focus Distance	3.5m / 3.8yd
Eye Relief	17mm
Exit Pupil	4.8mm
Diopter Adjustment	±4
Twilight Factor	18.3
Luminosity	27
Lens Glass	Fluoride
Lens Coating	Fully Multi-Coated
Prisms	Schmidt-Pechan
Chassis	Magnesium Alloy
Operating Temperature	-15°C to +55°C
Storage Temperature	-20°C to +70°C
Waterproof	1m / 30min (IPX7)
Weight	965g / 34oz
Warranty	10yr (2yr electronics)

RANGEFINDER

Laser Range	2377m / 2600yd
Min. Laser Range	13.5m / 15yd
Range Reflective	2377m / 2600yd
Range Buildings	1828m / 2000yd
Range Deer	750m / 820yd
Measuring Time	0.25s max
Accuracy	±1m @ 1km / ±2m over 1km
Angle	Yes
Angle Range	-70° to +70°
Angle Accuracy	±1°
Vertical Offset	Yes
Horizontal Distance	Yes
Scan Mode	Yes
Laser Type	Class 1
Laser Wave Length	905nm
Display Type	OLED (red)
Brightness Adjust	5 levels
Power Saver	10s Auto Shutoff
Power Supply	CR2 (3V)

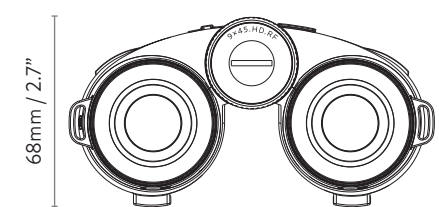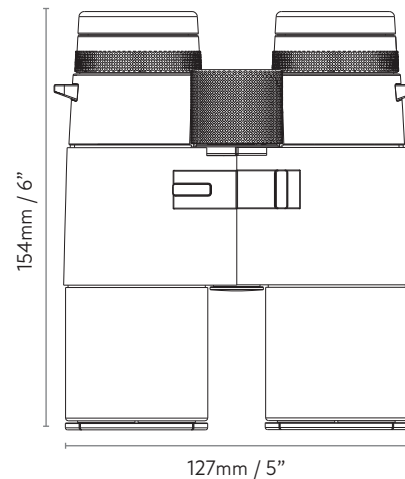

THE AIM IS OPTICAL PERFECTION